


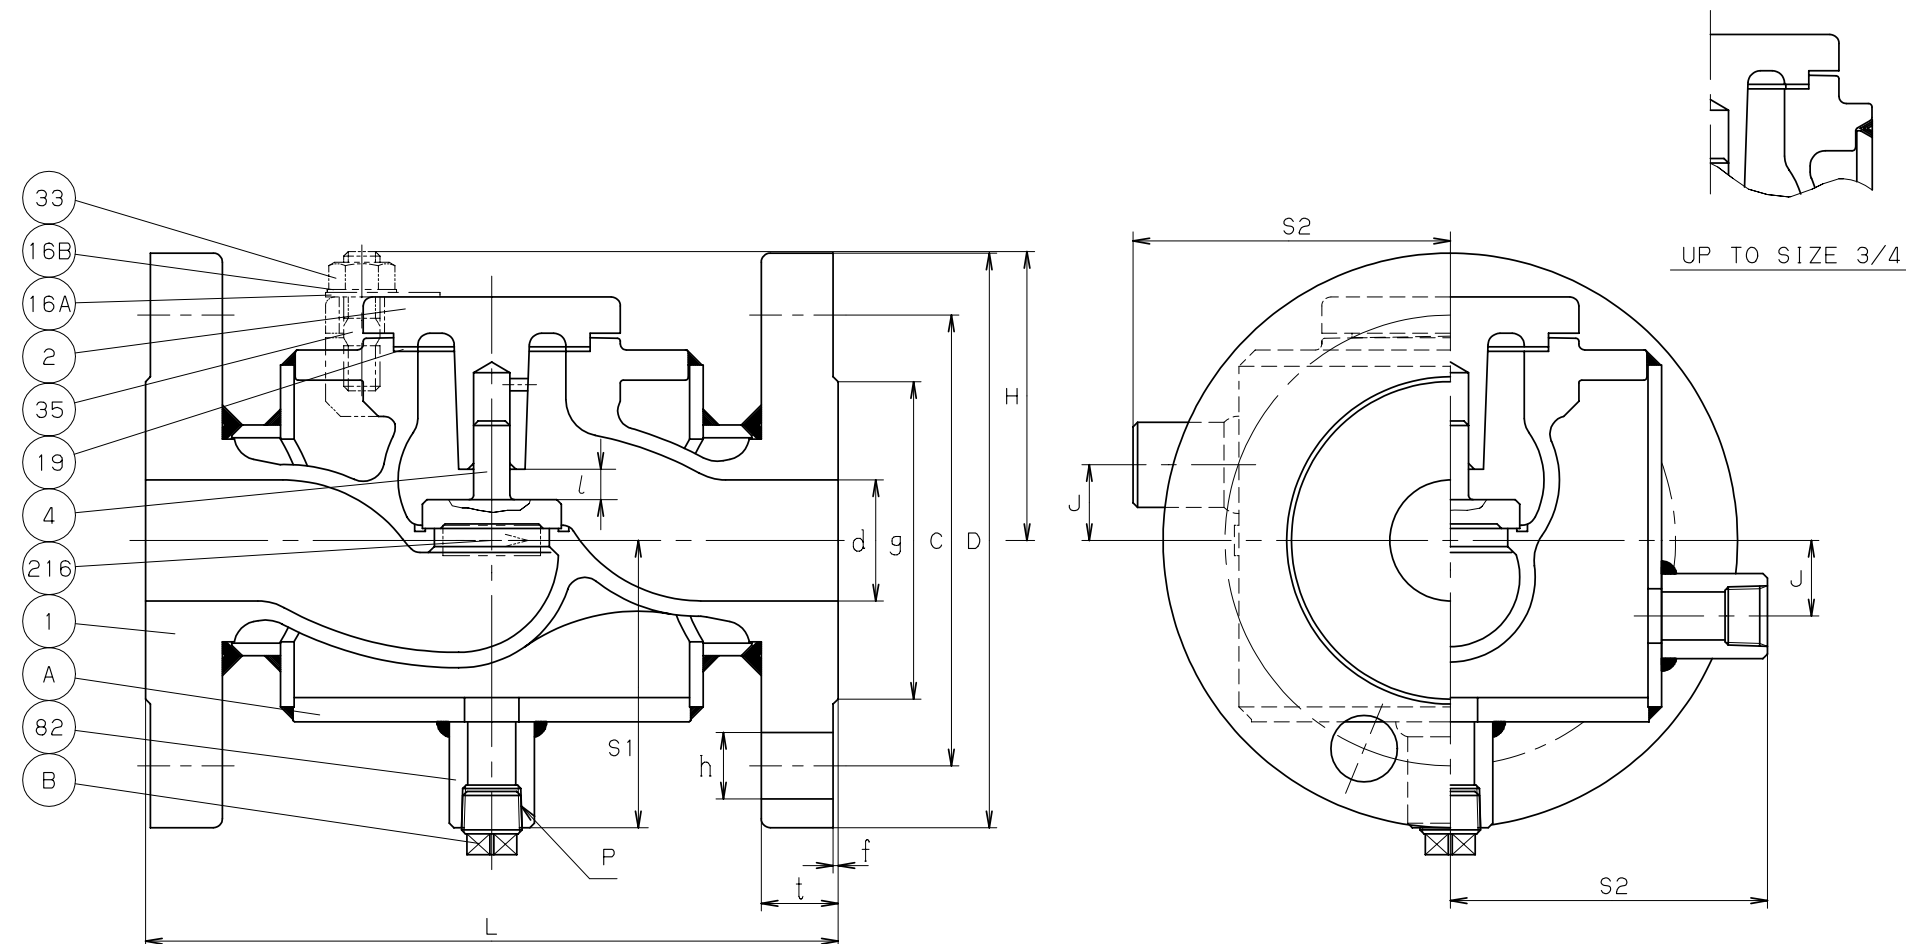

UP TO SIZE 3/4

DIMENSIONS.

UNIT:mm

NOMINAL SIZE		d	H	L	l	END FLANGE									S1	S2	SOCKET		J
						FLANGE SIZE	D	BOLT HOLE			BOLT SIZE	g	t	f			P	NO.	
								C	NO.	h									
1/2	15	15	73	165	6	1.1/2	156	114.5	4	22	3/4	73	20.7	1.6	75	80	Rc1/2	3	10
3/4	20	20	73	165	7	1.1/2	156	114.5	4	22	3/4	73	20.7	1.6	75	80	Rc1/2	3	10
1	25	25	73	203	7	2	165	127	8	19	5/8	92	22.3	1.6	85	86	Rc1/2	3	15
1.1/2	40	40	90	229	14	2.1/2	190	149	8	22	3/4	105	25.4	1.6	95	105	Rc1/2	3	25

NO	NAME OF PARTS	QTY	MATERIALS	SPECIFICATIONS
				JIS SPEC.
1	BODY	1	STAINLESS STEEL	SCS14A
2	COVER	1	STAINLESS STEEL	SCS14A
4	DISC	1	STAINLESS STEEL	SUS316
16A	NAME PLATE	1	ALUMINUM	A1050P
16B	WASHER	1	STAINLESS STEEL	SUS304
19	GASKET	1	NON-ASBESTOS SHEET	
33	COVER NUT	4	STAINLESS STEEL	SUS304 (8)
35	COVER BOLT	4	STAINLESS STEEL	SUS304 (B8)
82	SOCKET	1S	CARBON STEEL	S25C
216	FLOW DIRECTION	1	STAINLESS STEEL	SUS304
	PLATE			
A	JACKET	1S	CARBON STEEL	STPG370+SS400
B	PLUG	1	CARBON STEEL	S25C

[illegible]

STANDARD	FACE TO FACE OR END TO END	KITZ STANDARD
	END CONNECTION	ASME B16.5 CLASS 300
	WALL THICKNESS	ASME B16.34 CLASS 300
	PRESSURE TEST	API 598
FIGURE		300UNAJM

CLASS 300 CAST STAINLESS STEEL
LIFT CHECK VALVES

BOLTED COVER, JACKET TYPE, FLANGED ENDS.

DATE APPD	JAN.05.'09	DRAWING NO	△		
APPD BY	S. SANADA	964-B20007	△		
CHKD BY	Y. KONO		△		
DSGND BY	K. KOBAYASHI		△		
DRAW BY	Y. NAKAYAMA		△		
		REV-06	MARK	DATE	BY

KITZ CORPORATION